

B ATTENUATORS

SMA, up to 18 GHz, 2 Watts




SPECIFICATIONS:

Models: B

RoHS
Compliant


Electrical:
 Frequency Range _____ DC - 18.0 GHz
 Standard Freq. Values _____ 2.5, 6, & 18 GHz
 Standard dB Values* _____ 0 - 10, 12, 15, 20, 30, 40, 50, & 60 dB
In 1 dB Increments
 Attenuation Accuracy
 0 - 6 dB _____ ±0.3 dB
 7 - 10, 12, 15 & 20 dB _____ ±0.5 dB
 30 dB _____ ±0.75 dB
 40, 50 & 60 dB _____ ±1.50 dB
 VSWR
 DC - 4 GHz _____ 1.15:1 Max.
 4 - 8 GHz _____ 1.20:1 Max.
 8 - 12.4 GHz _____ 1.25:1 Max.
 12.4 - 18 GHz _____ 1.35:1 Max.
 Input Power _____ 2 Watts Avg. @ 25°C
Derated Linearly to 0.5 Watts @ +125°C
 Peak Power _____ 250 Watts Max.
(5uSec Pulse, .05% Duty Cycle)
 Impedance _____ 50 Ohms
 Operating Temp Range _____ -65°C to +125°C

Mechanical:
 SMA Connectors _____ Passivated Stainless Steel
Mates with MIL-STD-348
 Conductors _____ Gold Plated Beryllium Copper

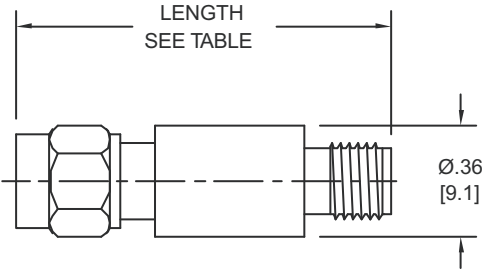

Connector Configuration	LENGTH			
	0 - 30 & 40 dB		31- 60 dB (except 40dB)	
	Inches	Millimeters	Inches	Millimeters
Male/Female	1.21 ±0.03	[30.7 ±0.8]	1.49 ±0.03	[37.8 ±0.8]
Male/Male	1.33 ±0.03	[33.8 ±0.8]	1.62 ±0.03	[41.1 ±0.8]
Female/Female	1.06 ±0.03	[26.9 ±0.8]	1.35 ±0.03	[34.3 ±0.8]

HOW TO ORDER:

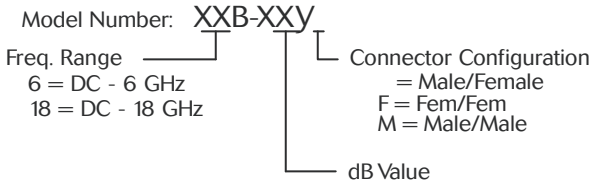

Ordering Examples:

- Model Number: **18B-20**
DC - 18 GHz; 20 dB; SMA - Male/Fem
- Model Number: **18B-6F**
DC - 18 GHz; 6 dB; SMA - Fem/Fem
- Model Number: **6B-3M**
DC - 6 GHz; 3 dB; SMA - Male/Male

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.

18B-ATT: REV K (M)



Aeroflex / Inmet, Inc. • 300 Dino Drive, Ann Arbor, MI 48103 • U.S.A.
 888-244-6638 or 734-426-5553 • FAX: 734-426-5557
 www.aeroflex-inmet.com • inmet-sales@aeroflex.com