

TERMINATIONS

TNC, DC - 12.4 GHz, 25 Watts

SPECIFICATIONS:


Models: 3112-TF, 3112-TM

RoHS
Compliant


Electrical:	
Frequency Range _____	DC - 12.4 GHz
VSWR	
DC - 1 GHz _____	110:1 Max.
1 - 4 GHz _____	1.25:1 Max.
4 - 8 GHz _____	1.35:1 Max.
8 - 12.4 GHz _____	1.45:1 Max.
Impedance _____	50 Ohms
Input Power _____	25 Watts Avg. @ +25°C
	Derated Linearly to 0.5 Watts @ +125°C
Peak Power _____	5 kW Max.
	(5uSec Pulse, .05% Duty Cycle)
Operating Temp Range _____	-65°C to +125°C
Mechanical:	
TNC Connectors _____	Passivated Stainless Steel
	Mates with MIL-STD-348
Conductors _____	Gold Plated Beryllium Copper
Housing _____	Anodized Aluminum



Model Number: **3112-TF**
TNC Female Connector

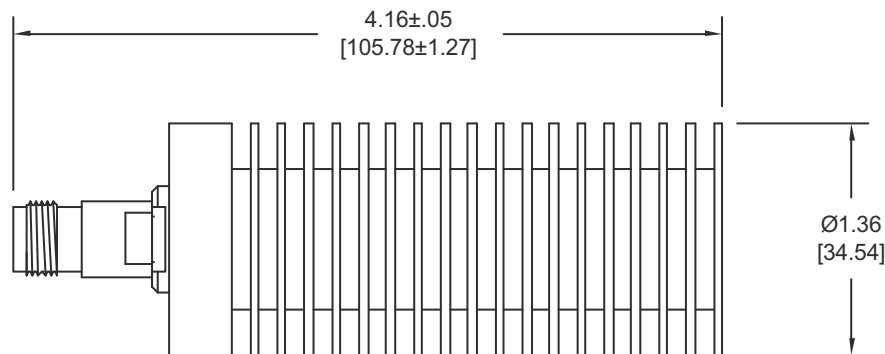

Model Number: **3112-TM**
TNC Male Connector

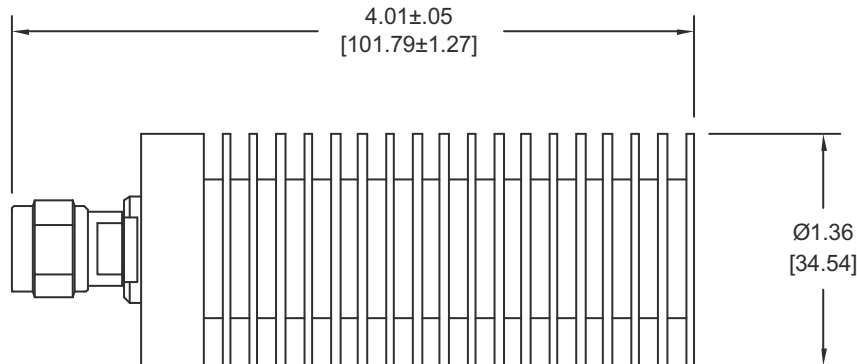

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.
Design, specifications are subject to change without notice. Contact factory for technical specifications before purchasing and/or use.

3112-T: REV-



Aeroflex / Inmet, Inc. • 300 Dino Drive, Ann Arbor, MI 48103 • U.S.A.
888-244-6638 or 734-426-5553 • FAX: 734-426-5557
www.aeroflex-inmet.com • inmet-sales@eroflex.com