

ETX115-M1

[0.5 – 2.7] GHz Broadband 2 Watt Power Amplifier Module

Application

NewEdge Signal Solutions ETX115 is a 2W Power Amplifier module delivering high gain, high power across a wide RF transmit bandwidth. This 2W compact module can be used for a wide range of applications including LTE Signals for use in tactical communication, test and measurement or electronic warfare systems. It has high gain across the full [0.5-2.7] GHz band and uses a single +12V supply.



Features


- Frequency: [500 – 2700] MHz
- P1dB: 33 dBm @ 1500 MHz
- Small Signal Gain: 38.0 +/- 1.5dB
- Single +12V Supply Rail
- Integrated Power Supplies and Sequencing
- High Efficiency: >20%
- Compact size: [2.6 x 1.86 x .75]"
- 50 Ohm Operation

Specifications


Electrical

	TA = +25° C, with Vcc = +12V, 50 Ohm System
Frequency	[0.5 – 2.7] GHz
Small Signal Gain	+40 dB
Gain Flatness	+/- 1.0 dB
Peak Output Power (P1dB)	+33 dBm
10MHz LTE Non Memory ACLR [25.5dBm Ave, 7.5dB PAPR]	> 45dBc
Input VSWR	< 2.2:1
Supply Voltage	+12 V
Supply Current (@ 33dBm)	<700 mA
Operating Temperature	[-40 to +85] C


ETX115 Small Signal Gain vs Frequency

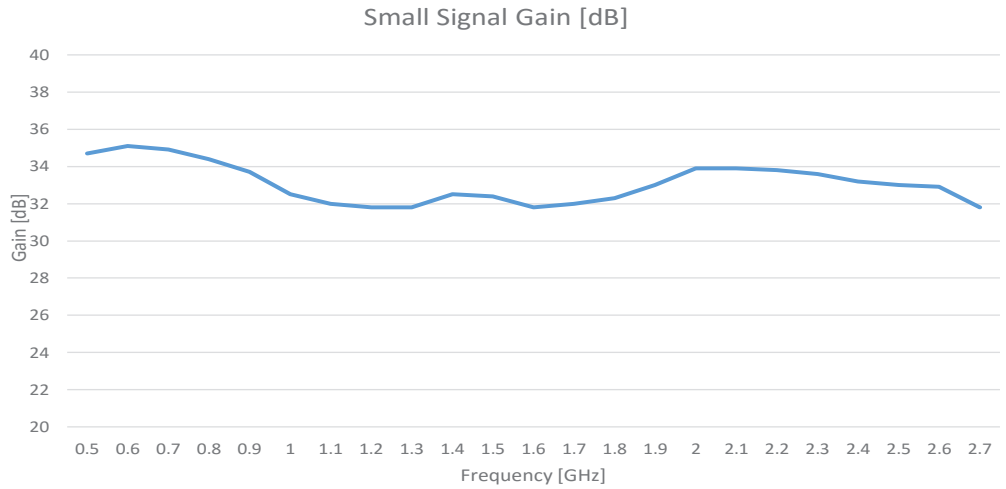


ETX115 Output Power vs Input Power by Frequency

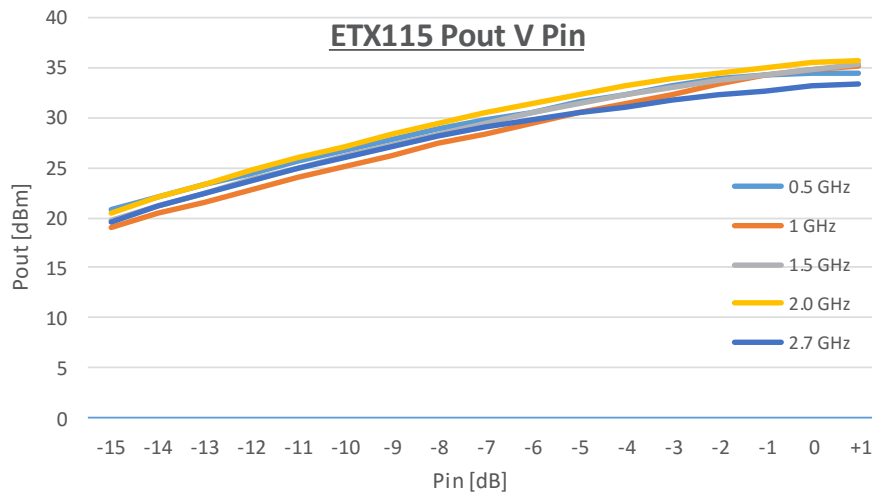

ETX115 Large Signal Gain vs Input Power by Frequency

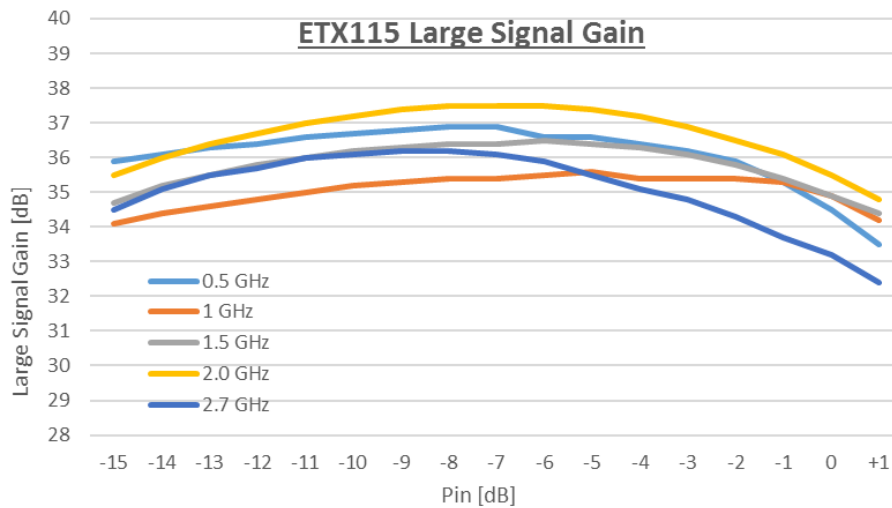

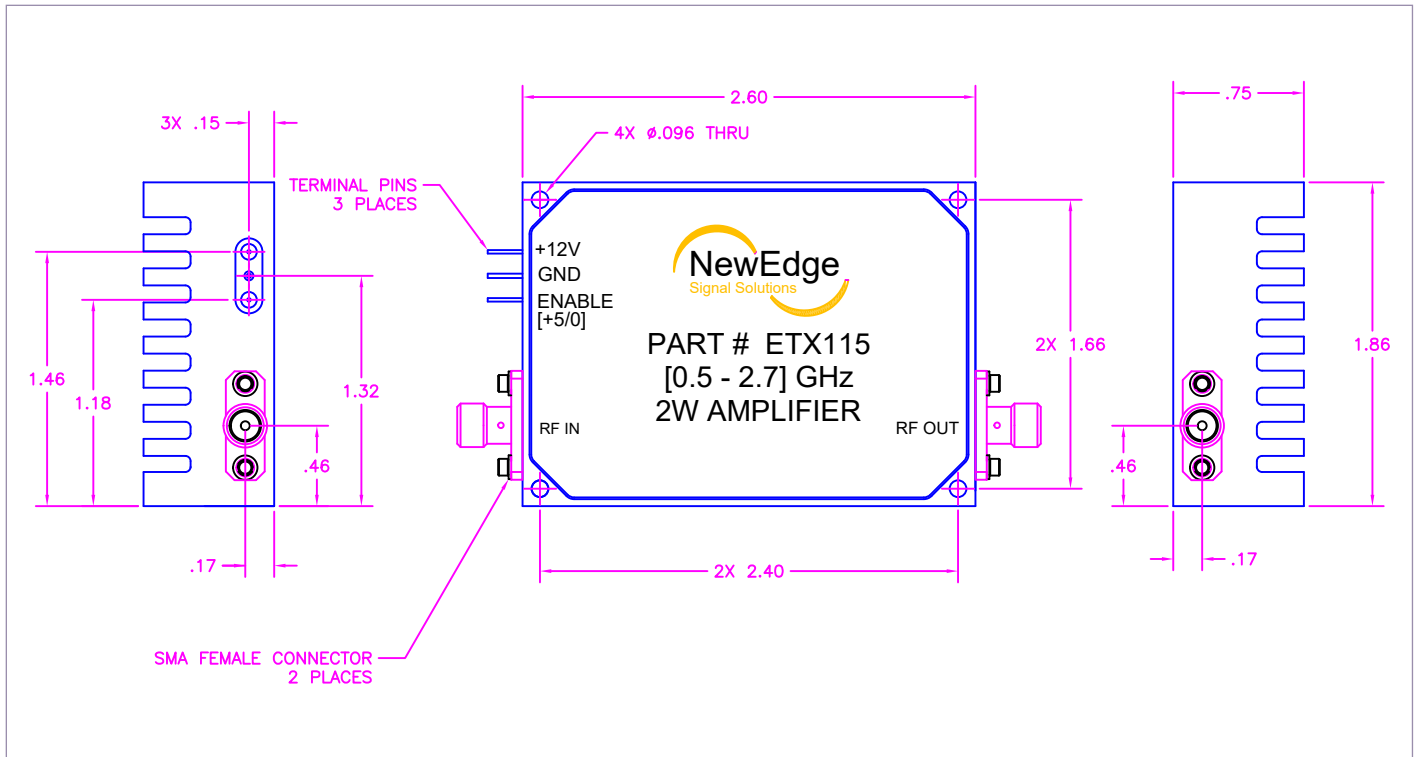

Disclaimer

Specifications are subject to change without notice. NewEdge Signal Solutions, LLC believes the information contained within this data sheet to be accurate and reliable. However, no responsibility is assumed by NewEdge Signal Solutions for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of NewEdge Signal Solutions. NewEdge Signal Solutions makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose. "Typical" parameters are the average values expected by NewEdge Signal Solutions in large quantities and are provided for information purposes only. These values can and do vary in different applications and actual performance can vary over time. All operating parameters should be validated by customer's technical experts for each application. NewEdge Signal Solutions products are not designed, intended or authorized for use as components in applications intended for surgical implant into the body or to support or sustain life, in applications in which the failure of the NewEdge Signal Solutions product could result in personal injury or death or in applications for planning, construction, maintenance or direct operation of a nuclear facility. All product sales are governed under NewEdge Signal Solutions Terms and Conditions (<http://www.newedges2.com/TermsandConditions.pdf>) as of date of purchase.

Global Stocking Distributor

Richardson RFPD
www.richardsonrfpd.com

Regional Direct Sales Representatives

Upstate New York & New England: **WLM Components**
www.wlmcomponents.com

Long Island / NJ / Eastern PA: **Sertechmcm**
www.sertechmcm.com

FL / GA / SC / NC / AL / MS / TN: **Eastern Component Sales**
www.easterncomponentsales.com

India Market: **Unified Electro-Tech Pvt. Ltd**
www.unified.co.in email: venkat_reddy@unified.co.in