
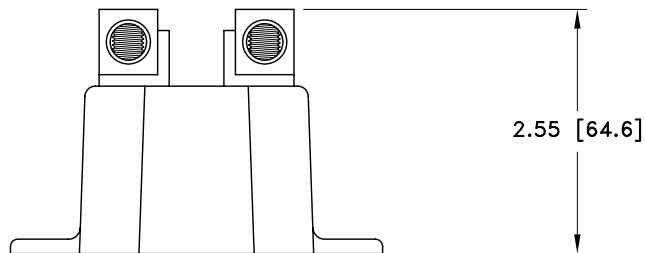


ALL DESIGN, OPERATIVE AND PROCESS DATA PERTAINING TO THE ARTICLE SHOWN ON THIS SHEET IS THE PROPERTY OF POLYPHASER CORPORATION. THE INFORMATION IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR APPROPRIATED BY OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF POLYPHASER CORPORATION.

REVISIONS				
REV LTR	DATE	ENG	MKTG	Q.A.
A	08/23/96 _{JC}	KCB	--	RM
B	01/08/99 _{JC}	KCB	--	RM
C	01/11/01 _{SH}	KCB	PH	LJ

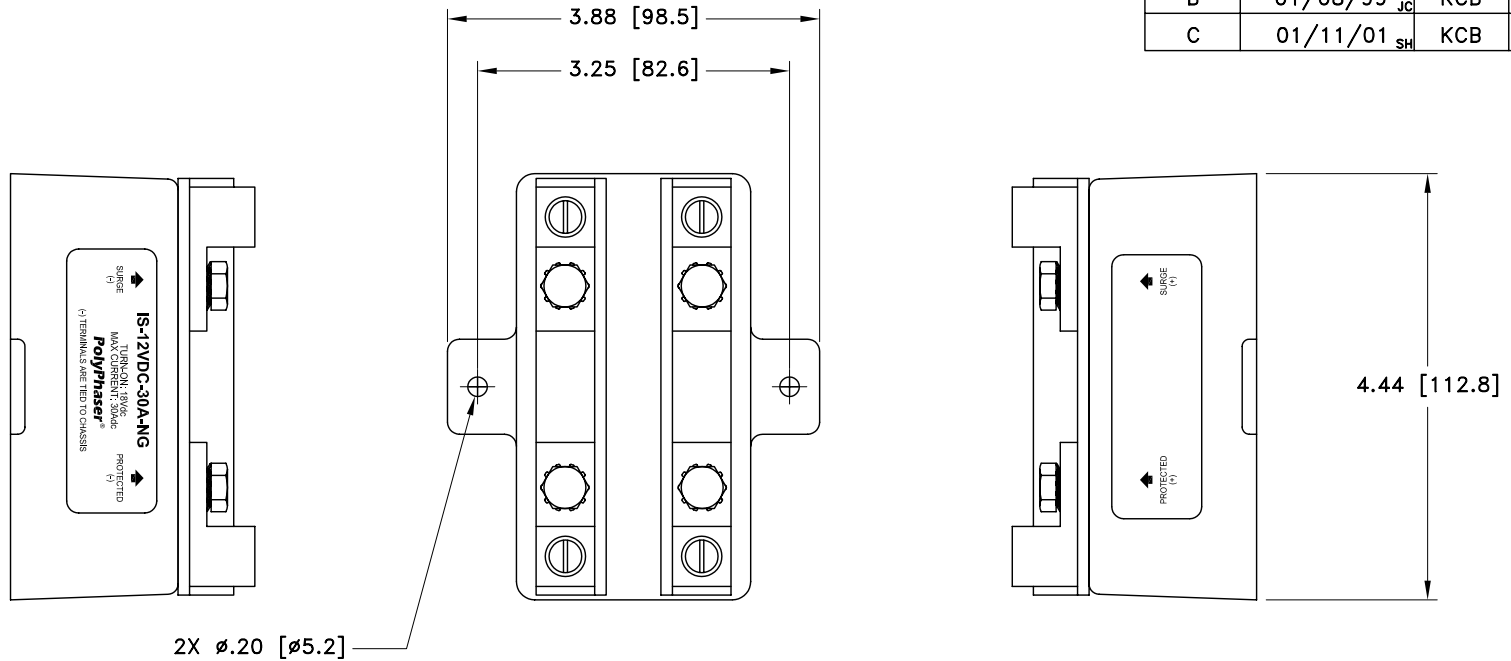

MAXIMUM CHARACTERISTICS
SURGE PER PAIR: 18kA IEC 1000-4-5 8/20μs WAVEFORM
TURN-ON: +18Vdc
TURN-ON TIME: <2ns
RESISTANCE: 0.02 Ω
CONNECTIONS: 14 TO 1/0AWG COMPRESSION LUG @30A 3/8-24 SS STUDS @50A
TEMPERATURE: -40°C TO +65°C STORAGE/OPERATING +50°C

CUSTOMER APPROVAL: _____ DATE: _____

ALL DIMENSIONS SHOWN ABOVE ARE FOR REFERENCE ONLY.

DRAFTER J. CALLISTER	DATE 03/08/96	PolyPhaser® P.O. BOX 9000, MINDEN, NV 89423-9000 (775) 782-2511 FAX (775) 782-4476 DWG NO/PART NO/DESCRIPTION IS-12VDC-30A-NG CUSTOMER PRINT			
MECH ENGINEER -----	DATE -----				
ELEC ENGINEER T. KULBIEDA	DATE 03/08/96				
MARKETING -----	DATE -----				
QUALITY DEPT R. MATHEUS	DATE 03/08/96	CAGE CODE 61114	FILE NAME -C1	SCALE 1/2	SHEET 1 OF 1