

ALL DESIGN, OPERATIVE AND PROCESS DATA PERTAINING TO THE ARTICLE SHOWN ON THIS SHEET IS THE PROPERTY OF POLYPHASER CORPORATION. THE INFORMATION IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR APPROPRIATED BY OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF POLYPHASER CORPORATION.

REVISIONS



REV LTR	DATE	ENG	MKTG	Q.A.
A	10/08/03 RS	LC	SD	LJ

**MAXIMUM CHARACTERISTICS DATA**

TURN-ON(@10mA):  
 $\pm 30\text{Vdc} \pm 10\%$   
 UL 497B STRIKE VOLTAGE BREAKDOWN  
 (100 Vdc /SEC RISE):  
 $\pm 31$  TO  $32$  Vdc  
 RESISTANCE:  
 $1\Omega \pm 20\%$   
 DATA RATE:  
 UP TO 25Mbps  
 MAX HOLDING CURRENT:  
 400mA @ +20°C  
 620mA @ -40°C  
 290mA @ +50°C

**GENERAL CHARACTERISTICS**

SURGE:  
 BELLCORE 1089 10/1000 $\mu\text{s}$  100A  
 TEMPERATURE:  
 -40°C TO +65°C STORAGE/OPERATING +50°C  
 WIRE RANGE:  
 16 TO 28 AWG.  
 APPLICATION:  
 INDOOR PANEL MOUNT

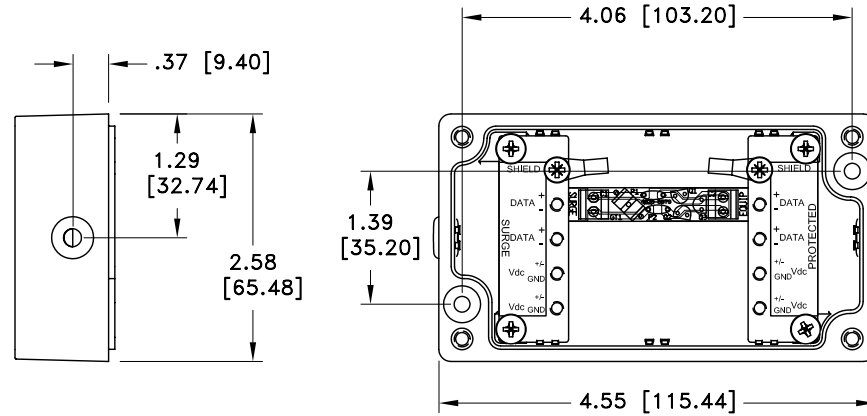


CUSTOMER APPROVAL: \_\_\_\_\_ DATE: \_\_\_\_\_

ALL DIMENSIONS SHOWN ABOVE ARE FOR REFERENCE ONLY.

NOTES:

- TORQUE 4X M4-20MM LID SCREWS TO 11 lbf-in MINIMUM.

DRAFTER R. SWART	DATE 09/23/03	 P.O. BOX 9000 MINDEN, NV 89423 TEL: 775-782-2511 FAX: 775-782-4476 DWG NO/PART NO/DESCRIPTION IX-1M CUSTOMER PRINT	
MECH ENGINEER R. DUNNING	DATE 09/24/03		
ELEC ENGINEER L. CHANG	DATE 09/24/03		
MARKETING S. DOTTER	DATE 09/24/03		
QUALITY DEPT L. JACQUES	DATE 09/24/03		
CAGE CODE 61114	FILE NAME -C1	SCALE 1 / 2	SHEET 1 OF 1