

A2100-A/B

Positioning Product

GPS Receiver Modules
Smart GPS Antenna Modules
Telematics Platforms



SiRFstarIV GPS Module: The Answer to All Challenges

The A2100 GPS modules enable fastest acquisition and tracking with the latest SiRFstarIV technology. With module versions supporting either 3.3V or 1.8V there is an appropriate solution for all telematics and power-sensitive mobile consumer application devices. In any case the module fully answers the demand for lowest power consumption with – amongst other features – SiRFaware™ technology. The removal of jammers does not only facilitate designs of new products, but guarantees operation even in hostile environments. Highest sensitivity, during acquisition or while tracking, allows for use in many different environments and under toughest conditions.

Features

Complete GPS module
Direct passive antenna support
Jamming detection and removal

Flash-based design

Best acquisition sensitivity
Lowest tracking power consumption
SiRFaware™ for constant Hot Start

Benefits

Easy integration
Fastest design-in
Minimal BOM


Configuration / Firmware update

Ideally suited for all
small battery powered
GPS applications

Your Global Source for
RF, Wireless & Energy Technologies

RichardsonRFPD
An Arrow Company

www.richardsonrfpd.com | 800.737.6937 | 630.208.2700

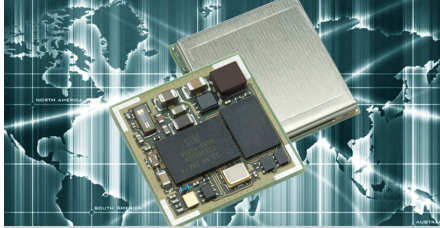

Technical Details A2100-A/B

PERFORMANCE

Channels	48
Correlators	~ 400,000
Frequency	LI - 1,575 MHz
Sensitivity¹	
Tracking	- 163 dBm
Navigation	- 160 dBm
Acquisition (cold start)	- 148 dBm
Position Accuracy²⁾ (horizontal)	< 2.5 m CEP (autonomous) < 2.0 m CEP SBAS
Time To First Fix	
Hot Start ²⁾	< 1 s
Warm Start ²⁾	< 32 s
Cold Start ²⁾	< 35 s

COMMUNICATION

UART - NMEA (Default)	
NMEA message Switchable	GGA, RMC, GSA, GSV, VTG, GLL, ZDA
Baud rate Switchable	4,800 (default) 1,200 to 115.2k
Ports	Tx (NMEA output) Rx (NMEA input)
UART - SiRF Specific SSB/OSP	
SiRFbinary protocol	Protocol for SiRFstar product family up to SSIII
Open Socket Protocol	Protocol extension for SiRFstarIV
Baud rate Switchable	57.6k (default) 1,200 to 115.2k
Ports	Tx (Binary output) Rx (Binary input)
SPI - NMEA/SiRF Specific (in preparation for A/B)	
Clock	Up to 6.8 MHz
Ports	DO (NMEA / Binary output) DI (NMEA / Binary input) SPI CLK (clock - input) SPI CS (chip select - input)
I2C - NMEA/SiRF Specific (in preparation for B)	
Clock	Up to 400 kbps
Ports	I2C DIO (NMEA / Binary input / output) I2C CLK (clock - input)

¹⁾ With best matched antenna
²⁾ All SVs with -130dBm

The information provided herein is believed to be reliable at press time. Maestro Wireless Solutions assumes no responsibility for inaccuracies or omission. Maestro Wireless Solutions assumes no responsibility for the use of this information, and all such information shall be entirely at the users own risk. Prices and specifications are subject to change without notice. Maestro Wireless Solutions does not authorize or warrant any of its products for use in life support devices and/or systems

HIGHLIGHTS

SiRFnav™	High availability and coverage; improved TTFF in weak signal environments
SiRFaware™	Keeps module in a state of readiness for rapid navigation (hot start)
Jammer remover technology	Detects and removes up to 8 in-band jammers with minimal loss of sensitivity
A-GPS	Embedded Extended Ephemeris (SiRFInstantFix1) and Ephemeris Push support
MEMS I2C interface	Prepared to use additional sensor information for improved navigation
Flash-based design	Prepared to store configuration and calibration data and to allow firmware updates

POWER

Supply voltage	3.0 to 3.6 VDC [A2100-A] 1.7 to 1.9 VDC [A2100-B]
Power consumption	(typical)
Fully tracking	47 mW
Trickle Power Mode (1Hz)	8 mW
SiRFaware™ Mode	500 µW
Hibernate Mode	30 µW
Antenna supply via Vant	Up to 6.8 MHz
Voltage range	up to 5.0V
Max. allowed current ³⁾	50 mA

MECHANICAL

Dimensions	
L x W x H	15.2 x 15.2 x 2.4 mm ³⁾
L x W x H	0.6" x 0.6" x 0.1"
Weight	1.2 g / 0.04 oz.

ENVIRONMENT

Temperature	
Operating	-40°C to +85°C
Storage	-40°C to +85°C
Humidity	Non condensing

³⁾ External current limiter suggested

Your Global Source for
RF, Wireless & Energy Technologies

RichardsonRFPD
An Arrow Company

www.richardsonrfpd.com | 800.737.6937 | 630.208.2700